

SINGLE ROOM

Energy Recovery Ventilator



EFFICIENT, RELIABLE AND ENERGY SAVING VENTILATORS



Fresh Air Supply and Extract Stale Air From The Room Alternately



Consume Little Energy



Maintain Heat Regeneration and Indoor Humidity Balance



Silence Operation



Reduce Heating and Air Conditioning Costs



Prevent Excessive Indoor Humidity and Mould Build-up



Easy to Install Through Internal Wall with Hole Diameter from 160-170mm



High Efficient Ceramic Energy Regenerator




Auto Shutter Can Prevent The Insects Entering and The Cold Air Flowing Backward When The Unit Stops



Outer Hood Can Prevent Rain Draining Back and Birds Nesting

Product Structure

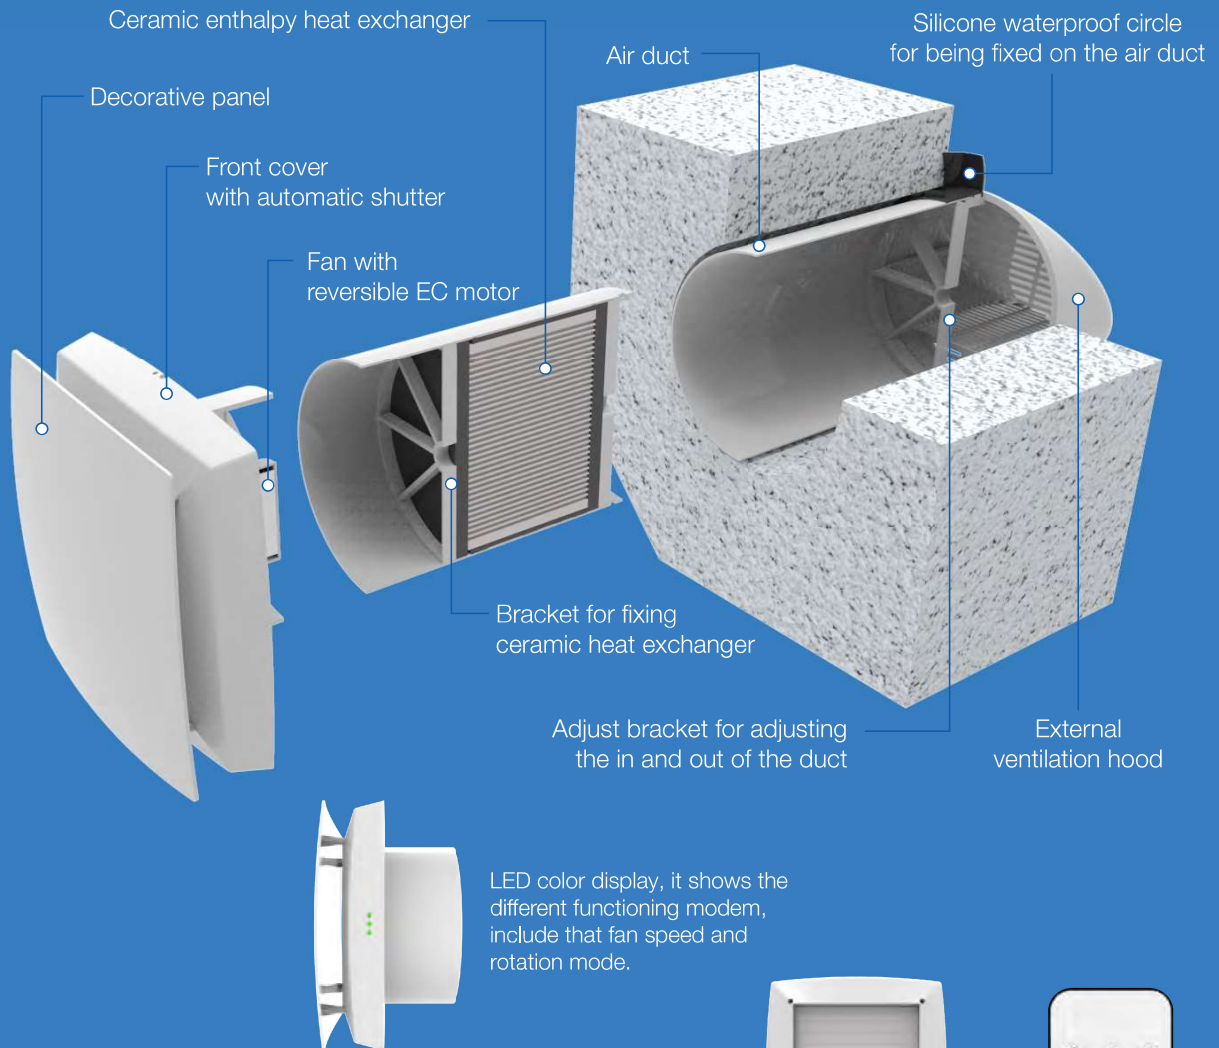

● Reversible EC-Fan

The reversible axial fan with a EC motor. Due to the applied EC technology the fan is featured with low power consumption and silent operation. The fan motor has integrated thermal overheating protection and ball bearings for long service life.



Automatic shutter



Remote control

● Ceramic Energy Regenerator


The high-tech ceramic energy accumulator with regeneration efficiency up to 97% ensures extract air heat recovery for warming of supply air flow. Due to the cellular structure the unique regenerator has a large air contact surface and high heat-conducting and heat-accumulating properties.

The ceramic regenerator is treated with an antibacterial composition which prevents bacteria growth inside of the energy regenerator. The antibacterial properties last for 10 years.

● Air Filters

The two integrated air filters with total filtration rate G3 provide supply and extract air filtration. The filters prevent ingress of dust and insects into the supply air and contamination of the ventilator parts. The filters also have antibacterial treatment.

The filter cleaning is done with a vacuum cleaner or water flushing. The antibacterial solution is not removed. F8 filter is available as a specially ordered accessory, but when installed, it reduces the air flow down to 40 m³/h.

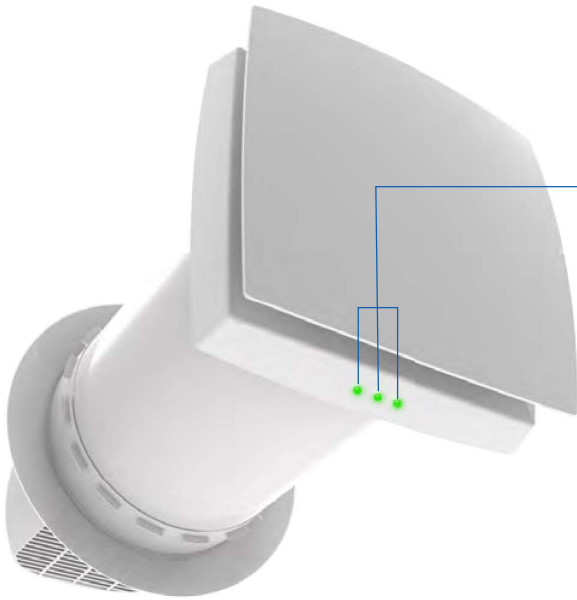

LED Display

1 2 3 LED Indicator

- The three leds only show the same color at the same time, which you can turn off the led by the remote controller.
- The green shows as air supply.
- The red shows as air exhaust .
- The yellow shows as automatic mode which is changed in 65s between the air supply and the air exhsust.
- 3 speed fan control for lighting the number of the led.
- The LED light is switchable.



Remote Control

Supply mode

Ventilation mode

Exhaust mode

Fan speed increase


LED light switch

Fan speed decrease

ON/OFF

Operation Modes


- **Ventilation Mode.** The ventilator runs in the air extract or air supply mode with a set speed. In case of synchronous operation of two connected ventilators one unit operates in the supply mode and the other one in the extract mode.
- **Regeneration Mode.** The ventilator runs in two cycles, 65 seconds each, to provide heat and moisture regeneration.

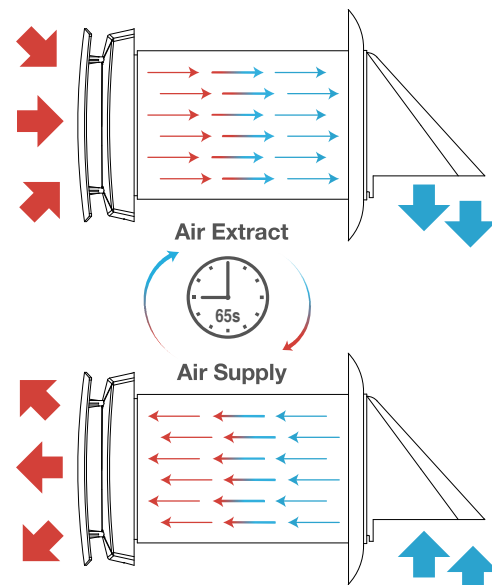

Working Principle


The reversible operation of the ventilator enables energy regeneration and consists of two cycles:

When it is cold outside:

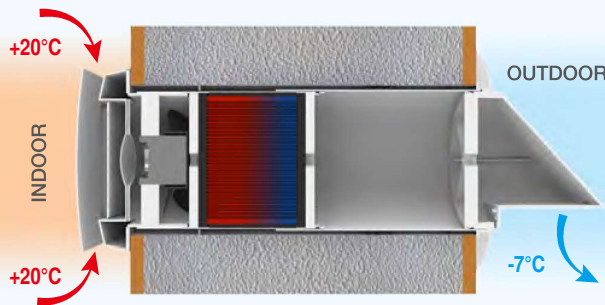


CYCLE I

The polluted warm air is extracted from the room and while passing the ceramic energy regenerator, the recuperator will absorb the heat and moisture. In 65 seconds, as the energy regenerator gets warmed, the ventilator automatically switches to the supply mode.

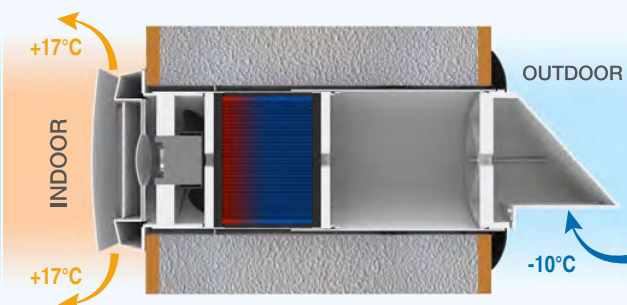


CYCLE II

The fresh, but cold outdoor air flows through the heat regenerator and absorbs the accumulated heat and moisture so that the temperature of supply air flow will close to the room temperature. In 65 seconds, when the energy regenerator gets cold, the ventilator switches to the air extract mode. The cycle starts from the beginning.

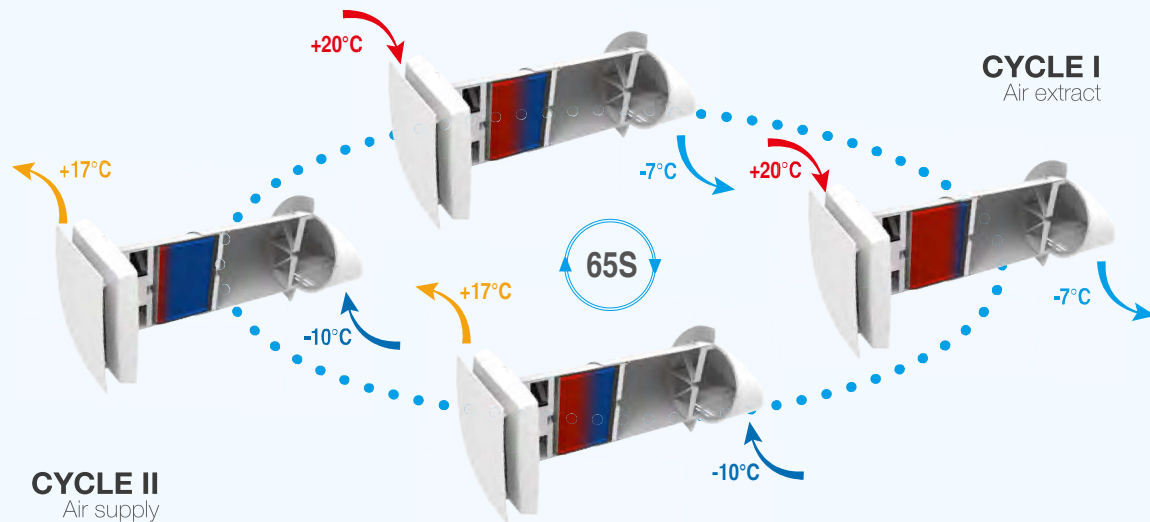


When it is hot outside:

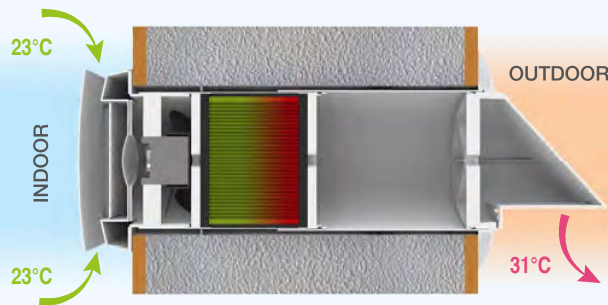

CYCLE I

The cold stale air is extracted and while passing the ceramic energy regenerator, the recuperator will be cooled. In 65 seconds, the ventilator automatically switches to the air supply mode.


Filter removes dust and insects from the air.

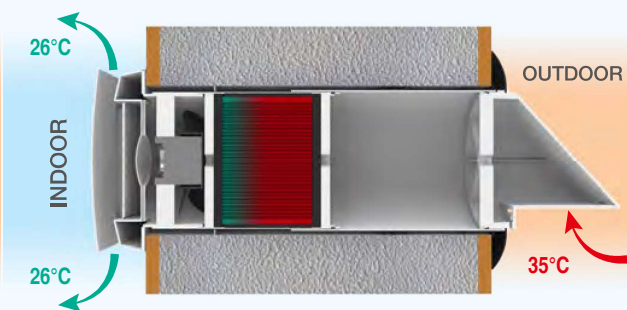

CYCLE II

Fresh warm outside air passes through the regenerator and the recuperator becomes cool due to the cold accumulated in it.

Filter removes dust and insects from the air. The cycle starts from the beginning.

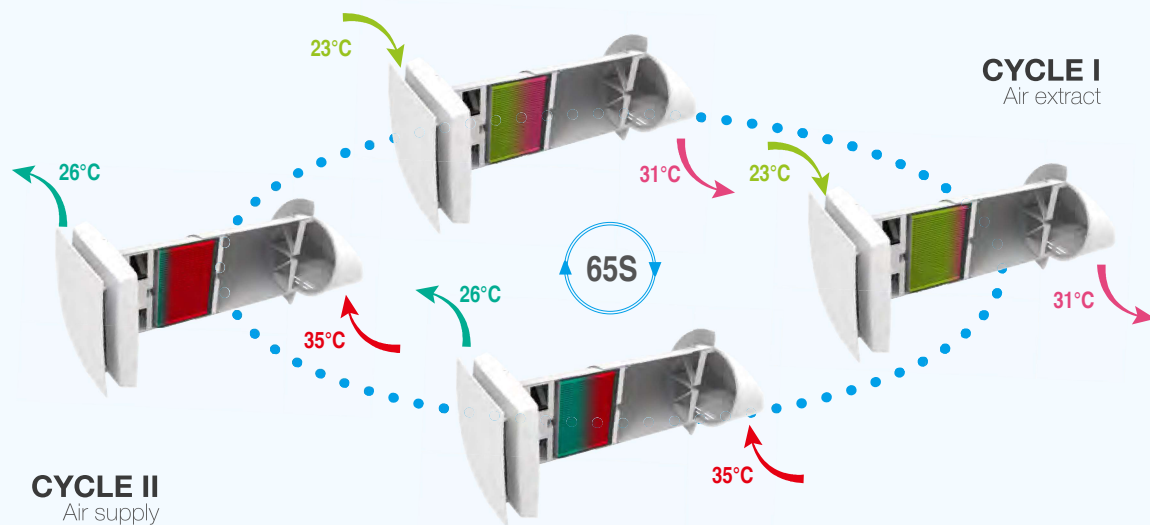

Applications

The ventilator is designed to ensure continuous mechanical air exchange in houses, offices, hotels, cafes, conference halls and other residential and public premises. The ventilator is equipped with a ceramic heat exchanger that enables supply of fresh filtered air heated by means of extract air heat regeneration. The ventilator is designed for through-the-wall mounting and is rated for non-stop operation. Transported air must not contain any flammable or explosive mixtures, evaporation of chemicals, sticky substances, fibrous materials, coarse dust, soot and oil particles or environments favourable for the formation of hazardous substances (toxic substances, dust, pathogenic germs).


Technical Data

IP22

A^{SEC}
CLASS

Voltage	220-240	V
Frequency	50/60	Hz
Input Power	12	W
Current	0.08	A
RPM	2000 (max)	-
Airflow (L/M/H)	20/42/64	m ³ /h
Noise	≤ 36.7	dB(A)
Regeneration Efficiency	≤ 92	%
Ingress Protection Rating	Ip22	-
Air Duct	∅ 157	mm
SEC Class	A	-
Mounting	Wall Mounting	-
Weight	3.4	kg

Dimensions

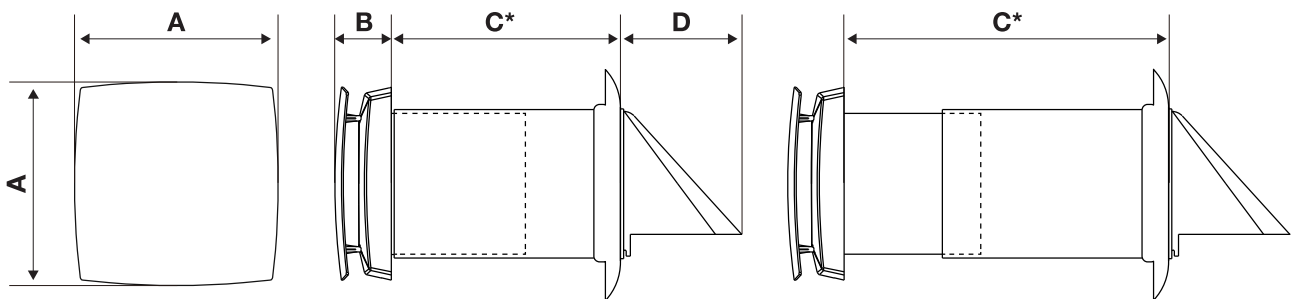

A	B	C	D	M	N	Unit
205	60	230~420	129	86	40	mm

C*: Size is customized.